

MT6000

32" Multimedia Advertising Kiosk



Specifications

- CPU:** Intel Celeron M 900MHz or 1 GHz
- L2 Cache:** CPU built-in
- System Chipset:** Intel 852GM/ICH4
- System Memory:** 1 x 184 pin DDR to 1 GB
- Display:** 32" WXGA TFT LCD, 400 nits
- Standard I/Os**
 - Serial port x 4 (COM 1,2 & 4 with +5V/12V power output on 9 pin 9; COM 2 is selectable for RS-232/422/485)
 - Parallel port SPP/EPP/ECP x 1
 - PS/2 Keyboard interface x 1
 - PS/2 Mouse interface x 1
 - VGA interface x 1
- Expansion Slots**
 - Compact Flash type II socket x 1
 - Memory Stick Card Reader socket x 1
 - Mini PCI socket x 1
- Audio:** Line-in & MIC-in
- Speaker:** Built-in 10W x 2
- Ethernet**
 - 10/100 Base-T Ethernet with RJ-45
 - Support Wake-on-LAN
- Power Supply:** 288W, 100~240V, 3.9 @ 50~60Hz

Peripheral & Storage Devices

- 2.5" HDD x 1
- Slim CD-ROM or equivalent device x 1

Mechanical


- Construction
 - Body: Heavy-duty steel
 - Profiles: Aluminum alloy

OS Support

- XP embedded, XP Professional

Applications

- Digital Signage
- Public information

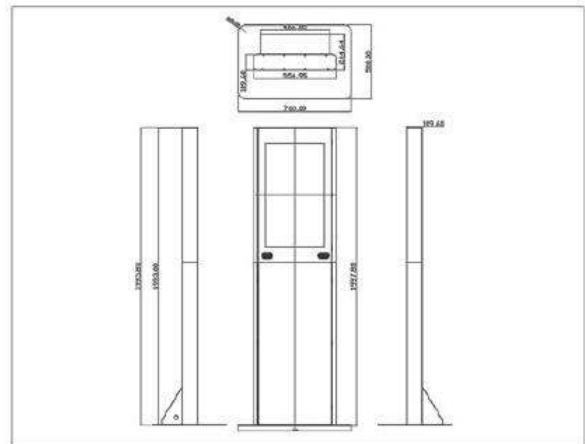

TouchSystems 220 Tradesman Drive Hutto, TX 78634 (512)846-2424

www.touchsystems.com